
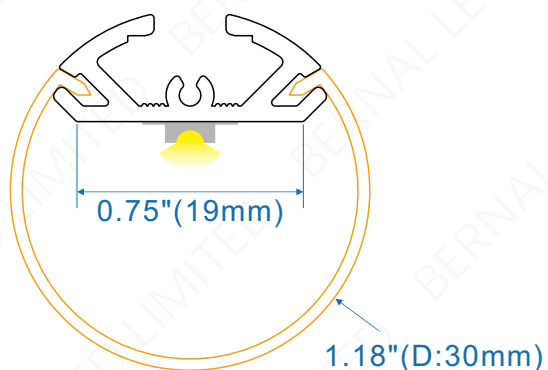


# BPS3030R1

ALUMINUM PROFILE

D30mm Anodized Treatment

**BERNAL** LED

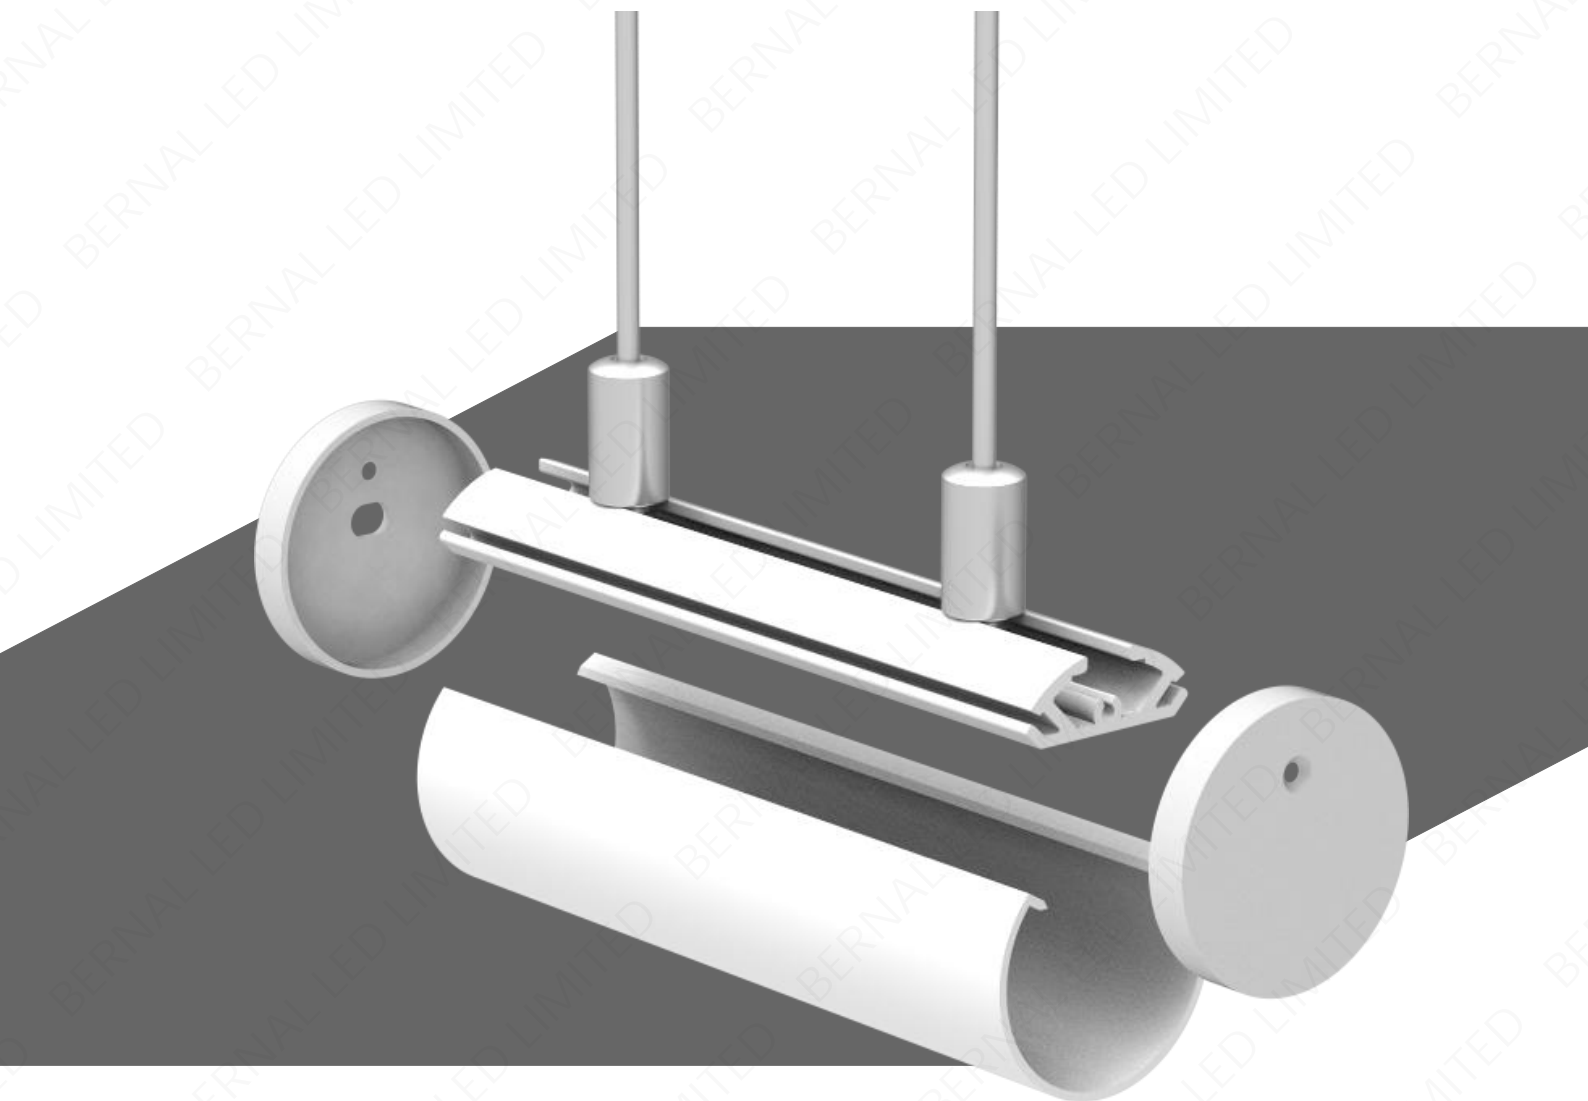


# BPS3030R1

## ALUMINUM PROFILE

D30mm Anodized Treatment

**BERNAL**LED

## ALUMINUM PROFILE

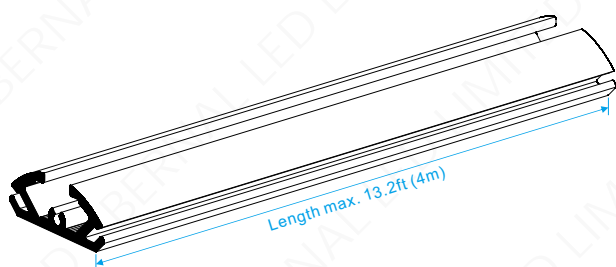

- ◆ Using High Quality 6063-T5 Aluminum as a material
- ◆ High Standard of anodizing aluminum surface
- ◆ International Standard Anodized Silver Color
- ◆ Heat Sink and physical protection to the LEDs
- ◆ Suitable for Max. 20mm width LED flexible strips
- ◆ Available length 1m, 2m, 2.5m, 3m, 4m



White Painted



Silver Anodized  
+ standard color




Black Anodized

## DIFFUSER

The milky color diffusers are capable of transmitting a large spread of the LED light. It is able to give a uniform brightness and is used as a cover for LED lights to eliminate or reduce the light points of the LEDs.


Color	Milky
Material	PC
Working Temperature	-50°C ~ 100°C
Light Transmission	86%
Coefficient Diffusion	Medium
Method of Assembly	Push in

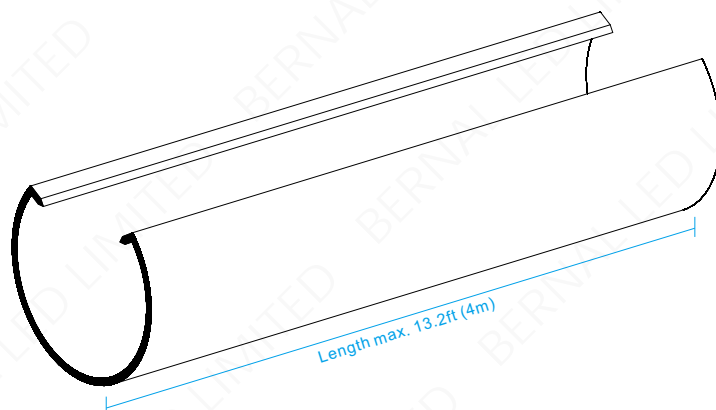

END CAP



Material	PC
Color	Gray

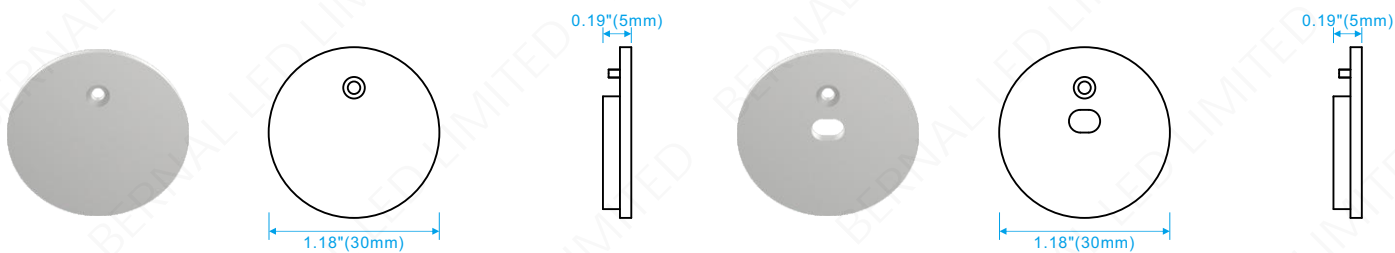





Material	Aluminum
Color	Silver

**BPS3030R1**  
ALUMINUM PROFILE

D30mm Anodized Treatment



**MOUNTING CLIP**




# BPS3030R1

## ALUMINUM PROFILE

D30mm Anodized Treatment

**BERNAL** LED




## STEEL WIRE

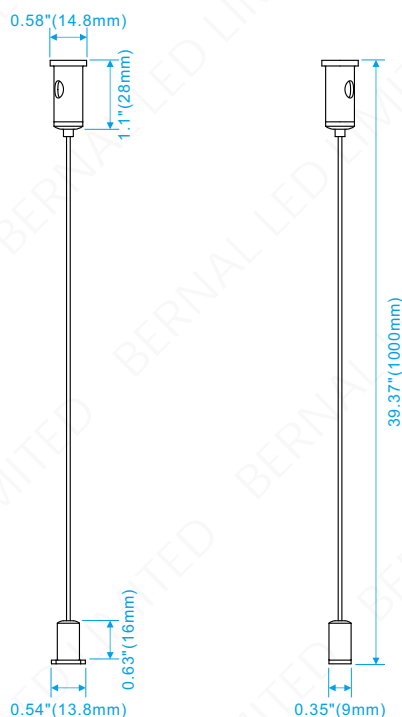

**Length:**

- 1.0meter
- 1.5meter
- 2.0meter
- 2.5meter
- 3.0meter
- 5.0meter


## INSTALLATION - MOUNTING CLIP

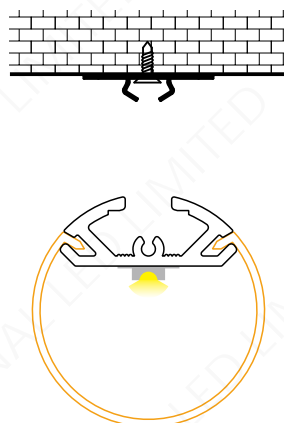

Attention:

The aluminum profile should be used with aluminum end caps for this installation way.

**INSTALLATION - MOUNTING CLIP**

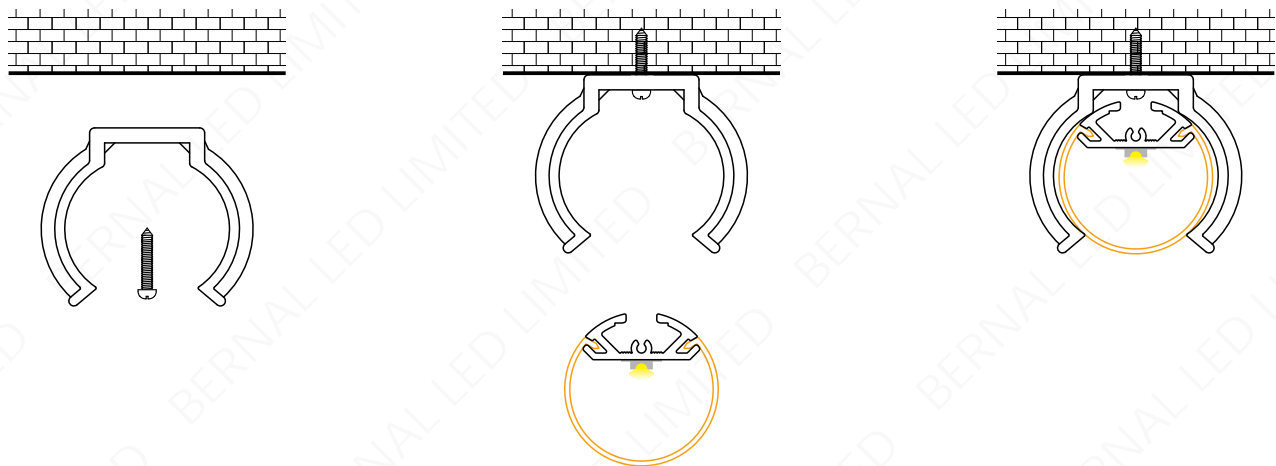

**INSTALLATION - STEEL WIRE**

