# BPS1715A1

17x15mm Anodized Treatment

## ALUMINUM PROFILE

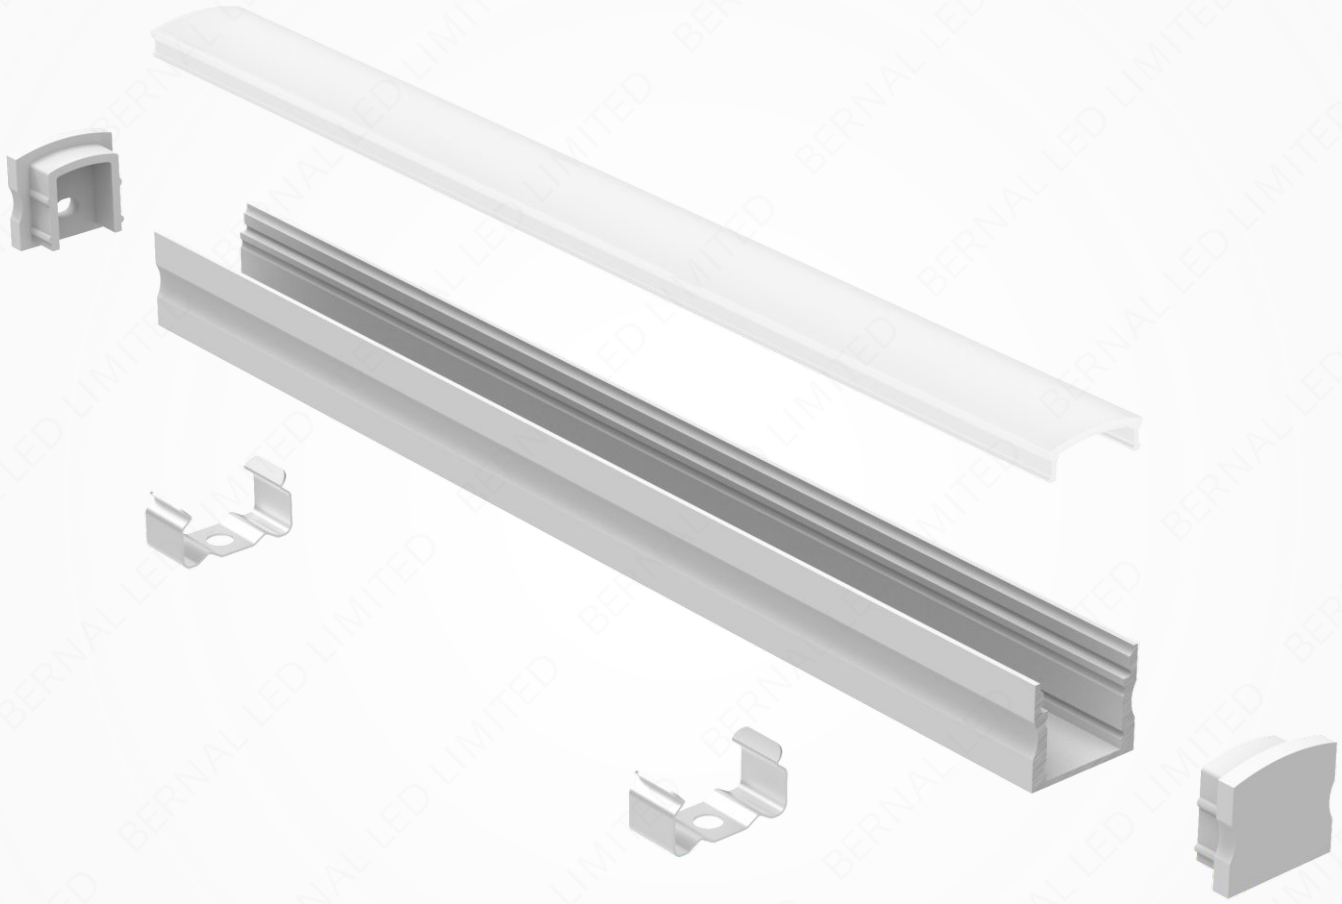








© 2025, BERNAL LED LIMITED. All rights reserved

# BPS1715A1
17x15mm Anodized Treatment

ALUMINUM PROFILE

## ALUMINUM PROFILE

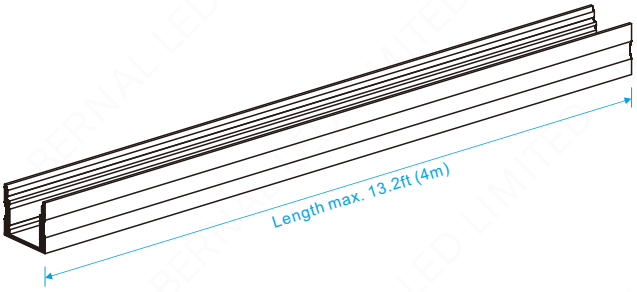




White Painted



Silver Anodized
* standard color



Black Anodized

- Using High Quality 6063-T5 Aluminum as a material
- High Standard of anodizing aluminum surface
- International Standard Anodized Silver Color
- Heat Sink and physical protection to the LEDs
- Suitable for Max. 12mm width LED flexible strips
- Available length 1m, 2m, 2.5m, 3m, 4m

## DIFFUSER

The milky color diffusers are capable of transmitting a large spread of the LED light. It is able to give a uniform brightness and is used as a cover for LED lights to eliminate or reduce the light points of the LEDs.

| | |
|---|---|
| Color | Milky |
| Material | PC |
| Working Temperature | -50℃ ~ 100℃ |
| Light Transmission | 86% |
| Coefficient Diffusion | Medium |
| Method of Assembly | Push in |

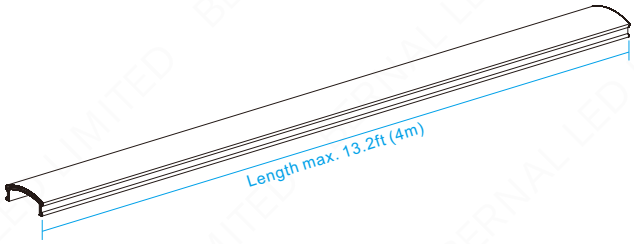


**Color:**
1.Transparent
2.Milky (opal)
* standard color
3.Black



www.bernal-led.com
© 2025, BERNAL LED LIMITED. All rights reserved

## INSTALLATION

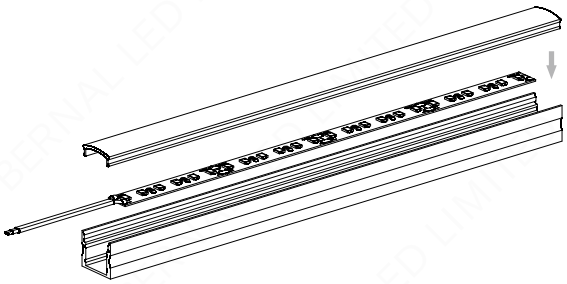

① Assemble the led strip into aluminum profile and press in the PC cover.

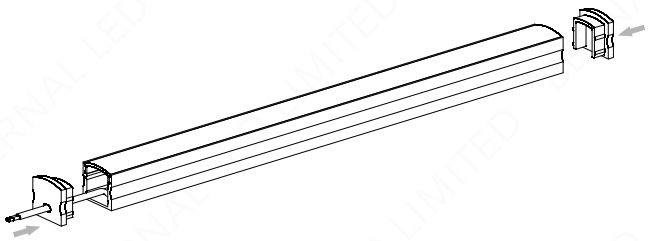

② Push the end caps into aluminum profile

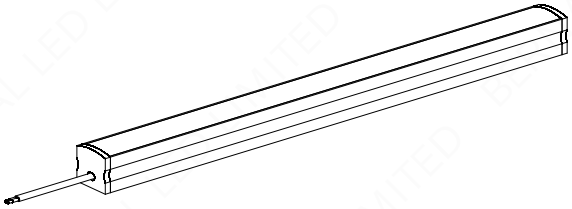

③ Finish the linear light

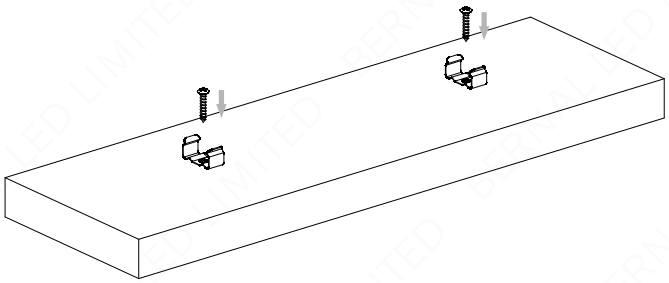

④ Fix the mounting clips in proper place

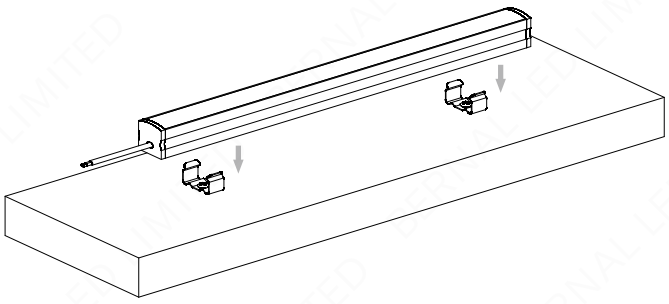

⑤ Push the finished linear light into the mounting clips

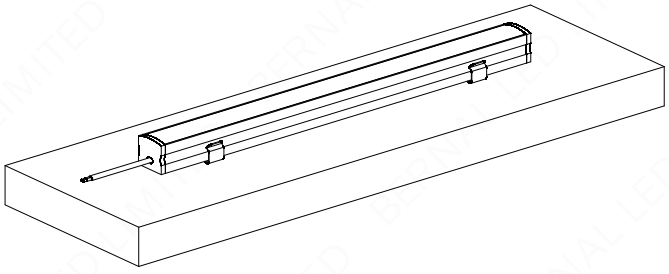

⑥ Connect the linear light with power supply.



www.bernal-led.com
© 2025, BERNAL LED LIMITED. All rights reserved