BPS171502

25x15mm Anodized Treatment

ALUMINUM PROFILE

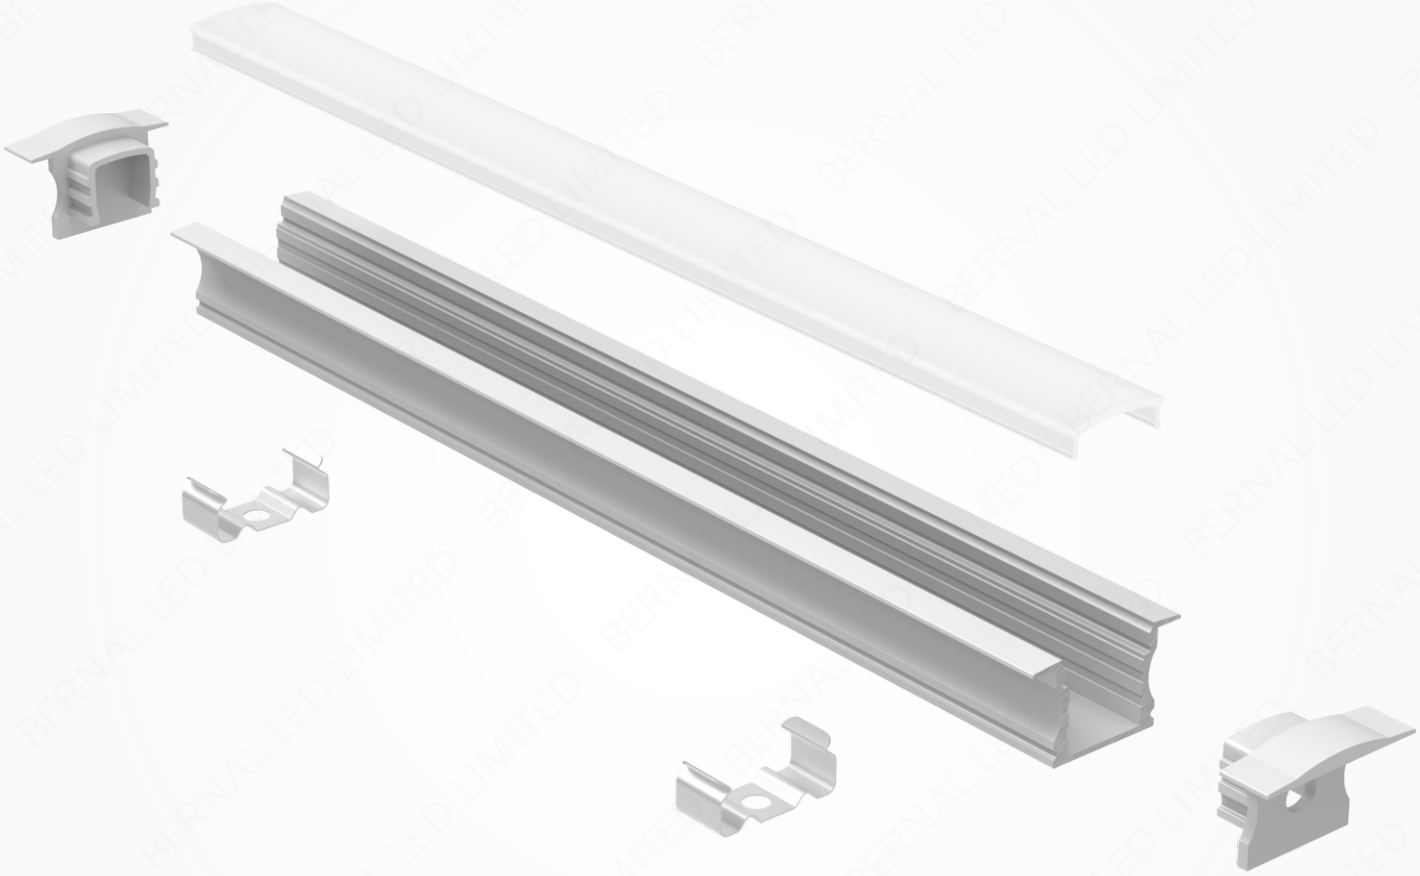



www.bernal-led.com
© 2025, BERNAL LED LIMITED. All rights reserved

BPS171502

25x15mm Anodized Treatment

ALUMINUM PROFILE

ALUMINUM PROFILE

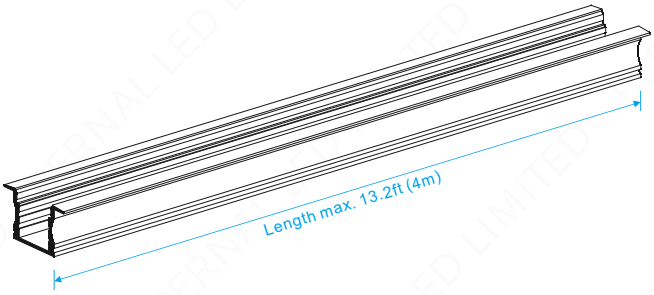



White Painted



Silver Anodized

* standard color



Black Anodized

- Using High Quality 6063-T5 Aluminum as a material
- High Standard of anodizing aluminum surface
- International Standard Anodized Silver Color
- Heat Sink and physical protection to the LEDs
- Suitable for Max. 12mm width LED flexible strips
- Available length 1m, 2m, 2.5m, 3m, 4m

DIFFUSER

The milky color diffusers are capable of transmitting a large spread of the LED light. It is able to give a uniform brightness and is used as a cover for LED lights to eliminate or reduce the light points of the LEDs.

Color	Milky
Material	PC
Working Temperature	-50℃ ~ 100℃
Light Transmission	86%
Coefficient Diffusion	Medium
Method of Assembly	Push in

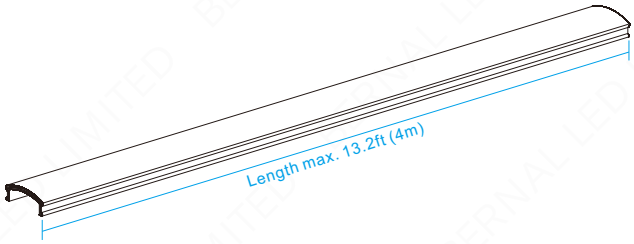

Color:

1.Transparent

2.Milky (opal)

* standard color

3.Black

www.bernal-led.com

© 2025, BERNAL LED LIMITED. All rights reserved

INSTALLATION

Installation 1:

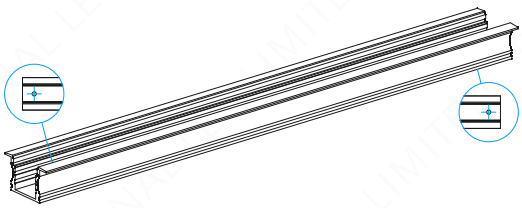

① Drill a hole at both sides of aluminum profile

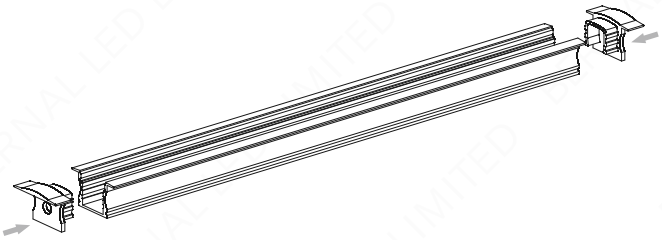

② Push the end caps into aluminum profile

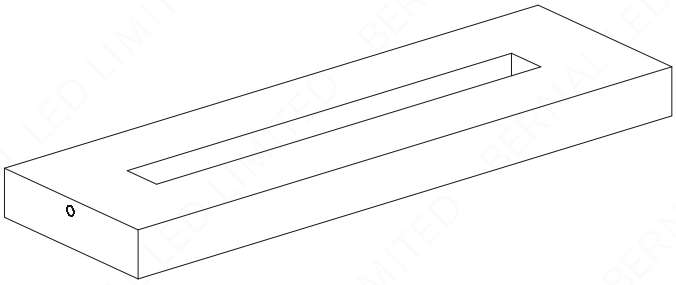

③ Open a groove on the board and drill a hole directly to the groove for lead wire.

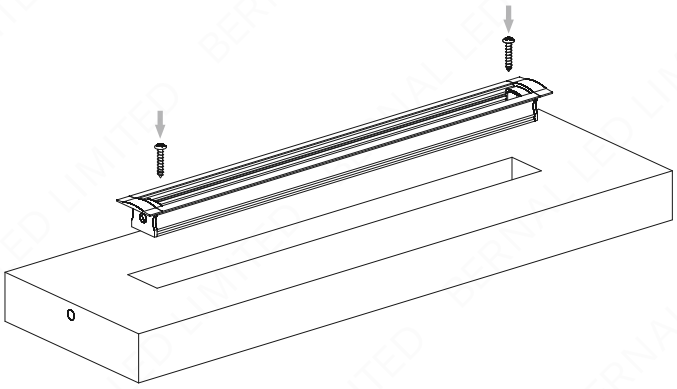

④ Fix the aluminum profile on the board by screw.

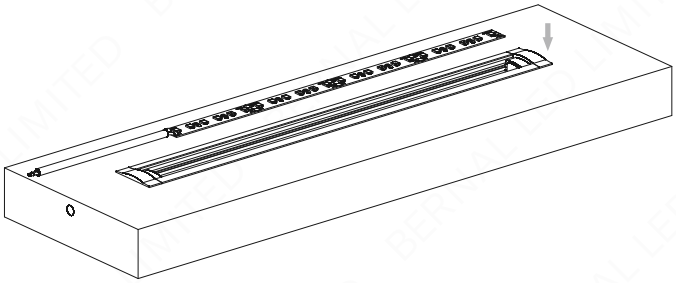

⑤ Stick the led flex strip on the bottom of aluminum profile, pull out the lead wire from the hole.

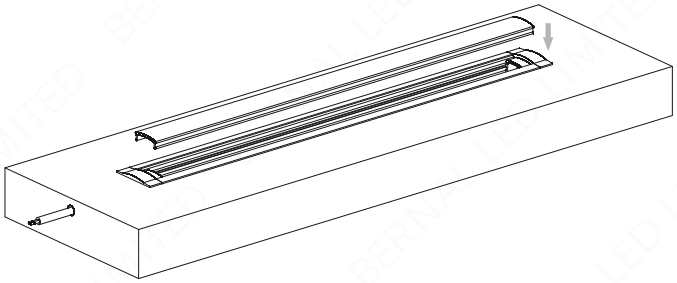

⑥ Press in the PC cover

www.bernal-led.com
© 2025, BERNAL LED LIMITED. All rights reserved

INSTALLATION

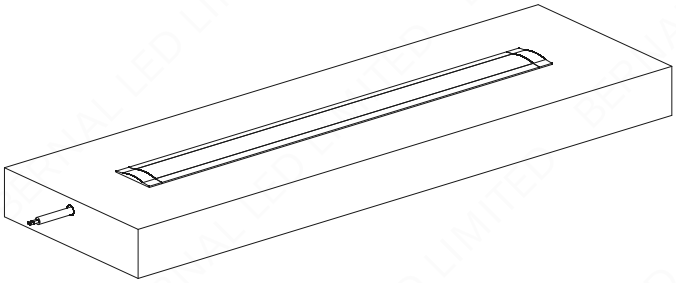

⑦ Connect the lead wire with power supply.

Installation 2:

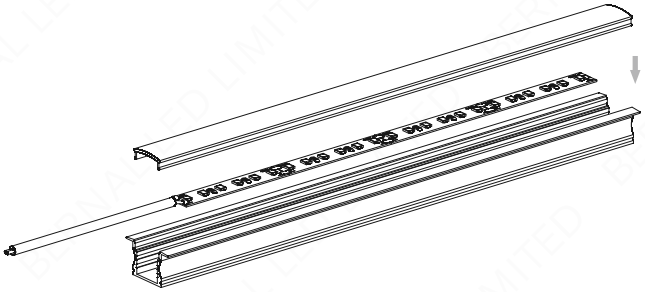

① Assemble the led strip into aluminum profile and press in the PC cover.

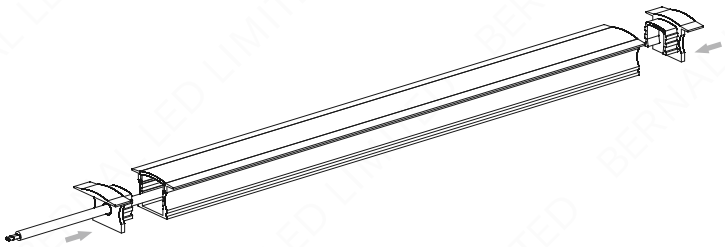

② Push the end caps into aluminum profile

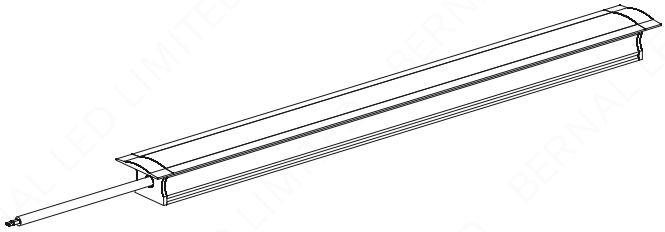

③ Finish the linear light

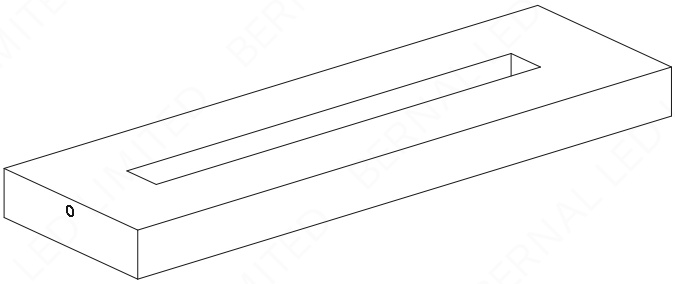

④ Open a groove on the board and drill a hole directly to the groove for lead wire.

www.bernal-led.com
© 2025, BERNAL LED LIMITED. All rights reserved

INSTALLATION

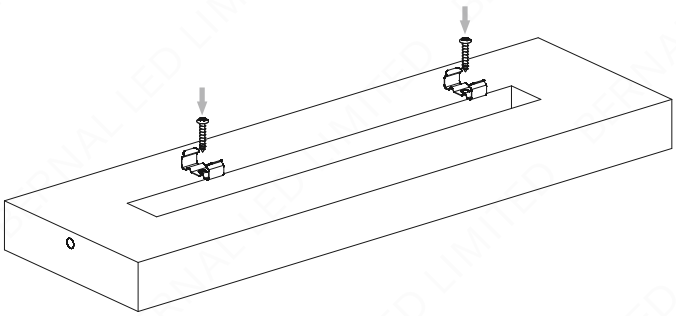

⑤ Fix the mounting clips in proper place

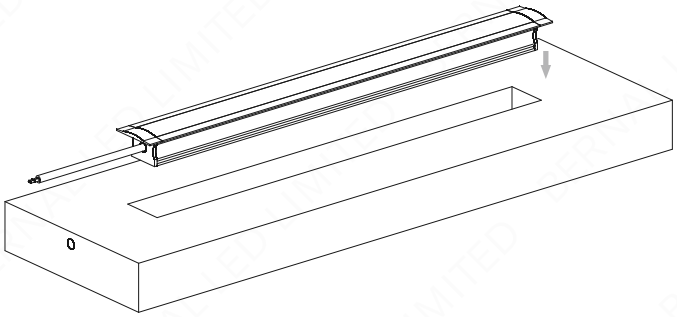

⑥ Push the finished linear light into the mounting clips pull out the lead wire from the hole.

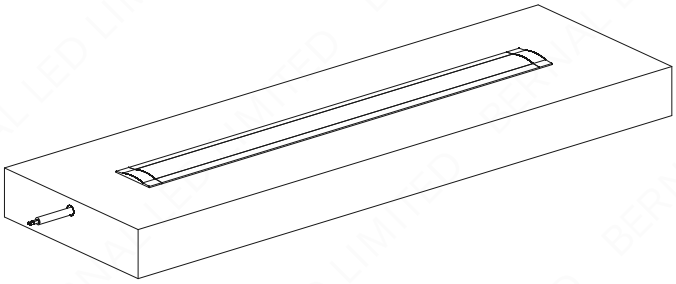

⑦ Connect the lead wire with power supply.

www.bernal-led.com
© 2025, BERNAL LED LIMITED. All rights reserved